




Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

5

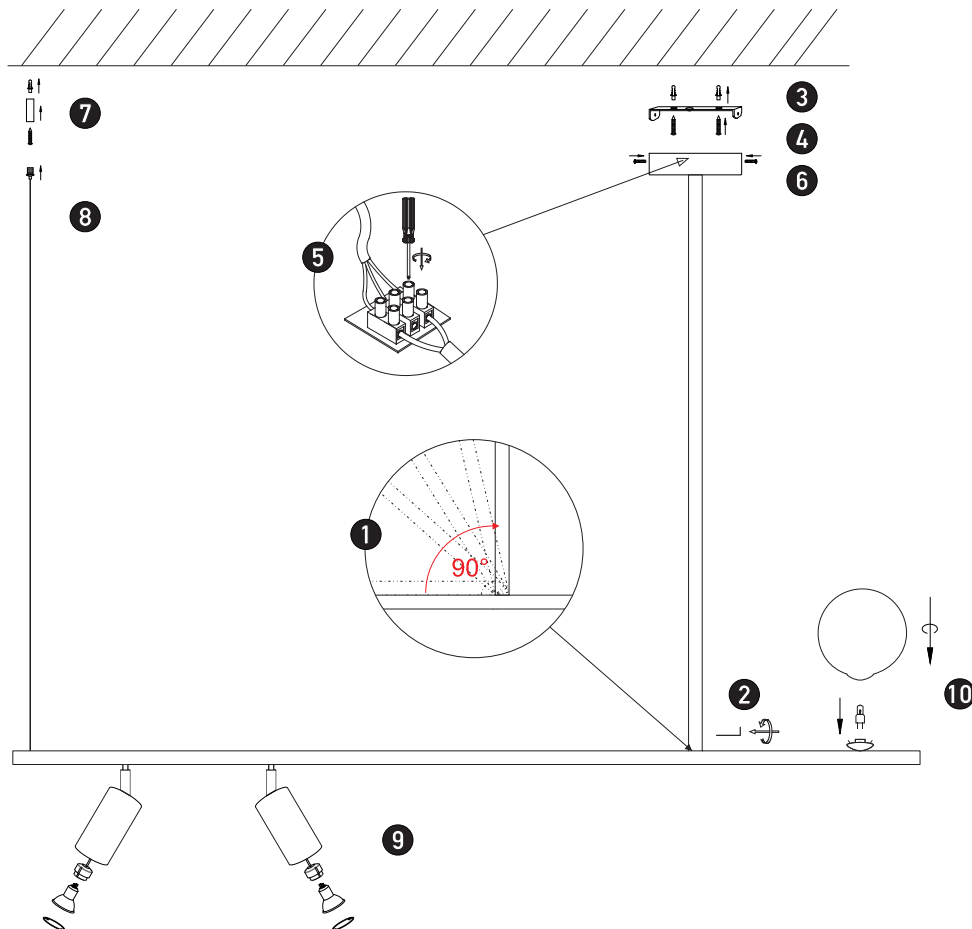

PENDANT LIGHT

22227

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Material:** Metal + Opal Glass
- **Lamp type:** 2xGU10 + 1xG9 , MAX 25W + MAX 9W
- **Ingress Protection:** IP20. Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

! Electrical products can cause death, injury, or damage to property. Maintenance and installation should only be carried out by a professional electrician.

- Ensure main supply is switched off.
- Carefully open the folding arms until they are at a 90° angle (1).
- Tighten with the Allen Key to stabilize the arms (2).
- Insert masonry plugs into mounting surface. (3).
- Fit mounting bracket onto mounting surface with self-tapping screws (4).
- Connect main supply wires to terminal block (5) making sure all connections are tight.
- Fit ceiling plate onto mounting bracket with screws (6).
- Insert masonry plugs (7) into mounting surface.
- Fit the wire onto mounting surface with self-tapping screws (8).
- Fit GU10 bulbs firmly into lamp holders and secure with the rings (9).
- Fit G9 bulb firmly into lamp holder and secure the opal glass shade (10).
- Reconnect power.

WARNING

- Make sure that the products is installed properly before connecting to electricity.
- Do not cover the fitting.
- Not for outdoor use or in wet conditions.

